


CONVOLUTED
TECHNOLOGIES PTY LTD

Protective Sleeving

Features:

- Available in a range of sizes 6mm to 125mm inside diameter
- Protection against molten metal splash
- Heat protection for hoses and cables
- Thermal insulation for hoses and piping
- Thermal protection against burns for employees
- Abrasive protection for hoses and cables
- Chemically resistant
- Flame resistant for a period of time
- Bundling of hoses, wires and cables
- Aerospace sleeve manufactured to AS1072
- Recommended by MDG-41 for mining
- Crimp rings in stainless steel

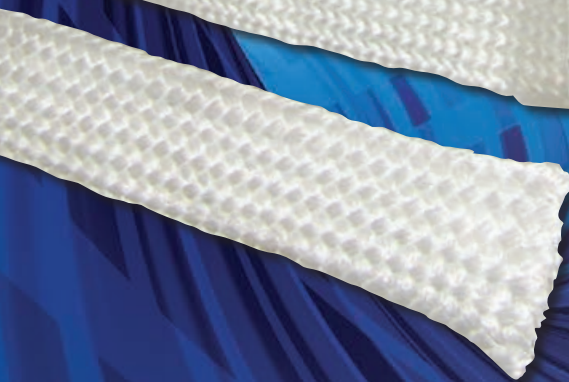

Protective Sleeving

Silicon Aerospace Sleeve and Silicon Tape

High-grade silicone rubber bonded to braided fibreglass sleeving.

Convoluted Technologies Silicon Aerospace Sleeve is designed to protect hose, wire and cable from the hazards of high heat and occasional flame.



Silicon Aerospace Sleeve is made of braided fibreglass yarns in a flexible substrate that is then coated with high-grade silicone rubber. The braided fibreglass construction gives a compacted inner sleeving. Aerospace sleeve manufactured to AS1072.

Silicon Aerospace Sleeve protects continuously to 260°C and will withstand a molten splash at 1200°C. The silicone coating makes it resistant to hydraulic fluids, lubricating oils, and fuels. They insulate against energy loss in piping and hosing; protect employees from burns; and allow "bundling" of wires, hoses, and cables.

Silicon Aerospace Sleeve is available on request ranging from 6mm to 127mm inside diameter.

Silicon Tape

Convoluted Technologies Silicon Tape is designed to seal the end of the Silicon Sleeve.

It has the same physical properties as the Silicon Aerospace Sleeving and is available in rolls of 25mm and 45 mm wide.

Silica Sleeve

Convoluted Technologies Silica Sleeve is made out of 96% pure SiO₂ braided silica fibre. This product has the best temperature resistant properties out of all the textile sleeves; it is suitable for continuous exposure at 982°C and withstands short term exposure up to 1650°C.

A combination of this product and the braided stainless steel sleeve is used in applications where there is abrasion combined with high temperatures.

Silica Sleeve is available on request ranging from 6mm to 38mm inside diameter.

Protective Sleeving

Fibreglass Sleeve

Braided fibreglass sleeve: economical hose and cable protection where exposure to molten splash, oils or moisture is not a factor.

Convoluted Technologies fibreglass sleeving is constructed of high quality type E glass that will not burn and will withstand continuous exposure to temperatures of 540°C. This material resists most acids and alkalis, is unaffected by most bleaches and solvents and is highly flexible. It is ideal for temperature insulation and protection.

Fibreglass Sleeve is available in full coils or cut to length as required ranging from 6mm to 127mm inside diameter.

Braided Stainless Steel Sleeve

Economical hose and cable protection resistant to molten splash, oils, moisture, chemicals and corrosive environments.

Convoluted Technologies stainless steel sleeving is constructed from braided stainless steel wire.

Stainless steel sleeving is ideal for armouring hydraulic, industrial hoses and electrical cables without losing any flexibility. It can provide electrical continuity between end connections in applications where static electricity is a problem.

Due to its stainless steel properties it has good resistance to temperatures and chemicals.

Braided stainless steel sleeve is available in full coils or cut to length as required ranging from 11mm to 287mm inside diameter.


Crimp Rings

For the attachment of the thermal and the stainless steel braided sleeving. We have stainless steel tube rings in diameters that slide over the outside of a hose and then can be crimped down.

Also used as crimp ferrules in low pressure applications instead of hose clamps.

We have big quantities of these rings in stock as we also use them in the assembly of stainless steel flexible hoses.

They range from 11mm to 287mm inside diameter.

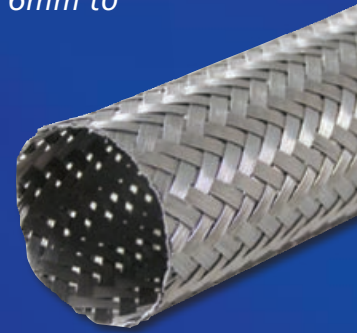

Technical

Data

| ID size of sleeve | | | Aerospace Silicone Sleeve | Silicone Tape | Fibreglass Sleeve | Silica Sleeve |
|-------------------|--------|-----|---------------------------|---------------|-------------------|---------------|
| Dash Size | in | mm | Part Number | Part Number | Part Number | Part Number |
| -4 | 1/4" | 6 | AESL-006 | | FGSL-006 | SISL-006 |
| -6 | 3/8" | 10 | AESL-010 | | FGSL-010 | SISL-010 |
| -8 | 1/2" | 13 | AESL-013 | | FGSL-013 | SISL-013 |
| -10 | 5/8" | 16 | AESL-016 | | FGSL-016 | SISL-016 |
| -12 | 3/4" | 19 | AESL-019 | | FGSL-019 | SISL-019 |
| -14 | 7/8" | 22 | AESL-022 | | FGSL-022 | SISL-022 |
| -16 | 1" | 25 | AESL-025 | SITA-025 | FGSL-025 | SISL-025 |
| -18 | 1 1/8" | 29 | AESL-029 | | | |
| -20 | 1 1/4" | 32 | AESL-032 | | FGSL-032 | SISL-032 |
| -22 | 1 3/8" | 35 | AESL-035 | | | |
| -24 | 1 1/2" | 38 | AESL-038 | | FGSL-038 | SISL-038 |
| -26 | 1 5/8" | 41 | AESL-041 | | | |
| -28 | 1 3/4" | 44 | AESL-044 | SITA-045 | FGSL-044 | |
| -32 | 2" | 51 | AESL-051 | | FGSL-051 | |
| -36 | 2 1/4" | 57 | AESL-057 | | | |
| -40 | 2 1/2" | 64 | AESL-064 | | FGSL-064 | |
| -44 | 2 3/4" | 70 | AESL-070 | | | |
| -48 | 3" | 76 | AESL-076 | | FGSL-076 | |
| -52 | 3 1/4" | 83 | AESL-083 | | | |
| -56 | 3 1/2" | 89 | AESL-089 | | FGSL-089 | |
| -60 | 3 3/4" | 95 | AESL-095 | | | |
| -64 | 4" | 102 | AESL-102 | | FGSL-102 | |
| -72 | 4 1/2" | 114 | AESL-114 | | | |
| -80 | 5" | 127 | AESL-127 | | FGSL-127 | |

| Single Crimp Rings | | | Double Crimp Rings | | | Stainless Steel Braid | |
|--------------------|------|-------|--------------------|--------|-------|-----------------------|-----|
| Part number | ID | Width | Part number | ID | Width | Part number | ID |
| SWRNG-006 | 13 | 20 | DWRNG-006 | 14 | 20 | BRAID-006 | 11 |
| SWRNG-008 | 14.5 | 20 | DWRNG-008 | 16 | 20 | BRAID-008 | 14 |
| SWRNG-010 | 16.5 | 20 | DWRNG-010 | 17.5 | 20 | BRAID-010 | 18 |
| SWRNG-012 | 20.5 | 20 | DWRNG-012 | 21.5 | 20 | BRAID-012 | 21 |
| SWRNG-016 | 24.5 | 20 | DWRNG-016 | 27 | 20 | BRAID-016 | 25 |
| SWRNG-020 | 29.5 | 25 | DWRNG-020 | 30.5 | 25 | BRAID-020 | 30 |
| SWRNG-025 | 37 | 25 | DWRNG-025 | 39 | 25 | BRAID-025 | 37 |
| SWRNG-032 | 44.5 | 30 | DWRNG-032 | 46.50 | 30 | BRAID-032 | 44 |
| SWRNG-040 | 54.5 | 30 | DWRNG-040 | 57 | 30 | BRAID-040 | 54 |
| SWRNG-050 | 68 | 35 | DWRNG-050 | 71 | 35 | BRAID-050 | 68 |
| SWRNG-065 | 84.5 | 35 | DWRNG-065 | 87 | 35 | BRAID-065 | 86 |
| SWRNG-080 | 98.5 | 40 | DWRNG-080 | 101.50 | 40 | BRAID-080 | 99 |
| SWRNG-100 | 121 | 50 | DWRNG-100 | 123.5 | 50 | BRAID-100 | 121 |



Unit 2/163 Prospect Highway, Seven Hills, NSW, 2147
 Phone: 02 9838 9599 Fax: 02 9838 9611
 Email: admin@convolutedtechnologies.com.au
www.convolutedtechnologies.com.au